



\\0server\user_folders\Town Projects\AutoCAD Projects\Non-Town Wide\Details\Sanitary\RD-05\Cul-De-Sac\Residential-Gutter-Center.dwg

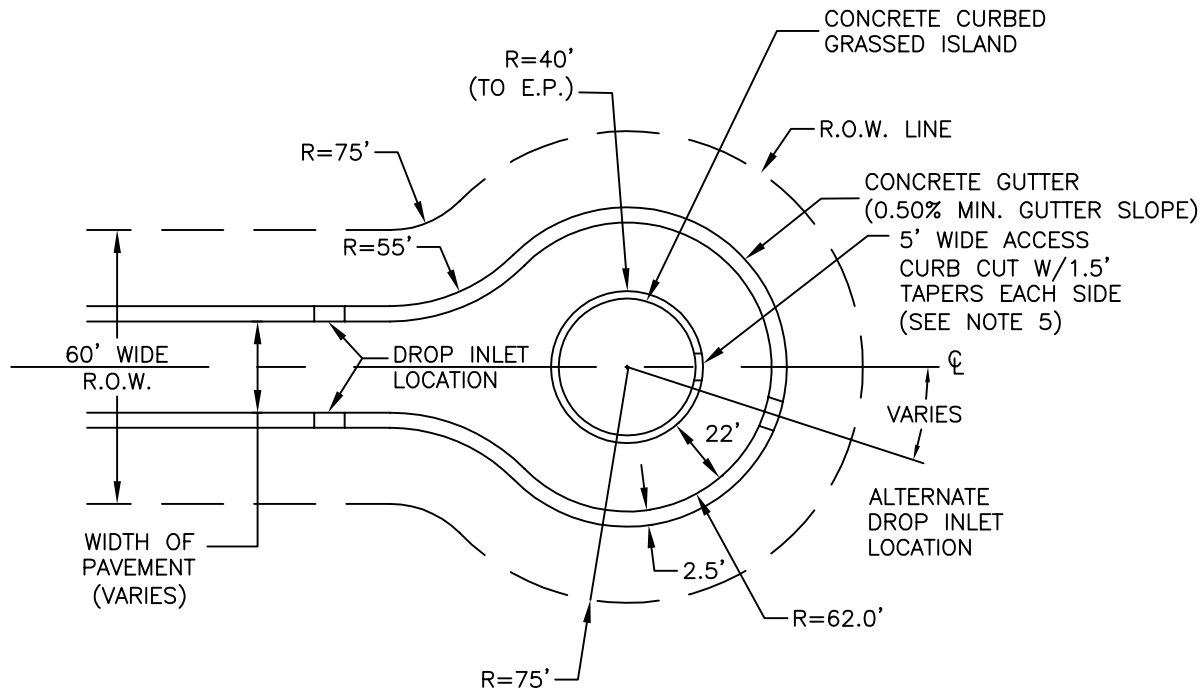

NOTES:

1. ALL GUTTER RADII ARE MEASURED TO INSIDE EDGE OF GUTTER AT PAVEMENT.
2. CENTER OF CUL-DE-SAC TO BE GRASSED AND CURBED. ALL CURB RADII ARE MEASURED TO FRONT FACE AT PAVEMENT.
3. MINIMUM PAVEMENT, GUTTER AND GRASSED AREA SLOPES ARE TO BE MAINTAINED.
4. NORMAL PAVEMENT CROSS SLOPE (CROWN) WILL TRANSITION TO CROSS SLOPE FROM ISLAND TO OUTSIDE EDGE OF PAVEMENT IN CUL-DE-SAC.
5. DEPRESSED CONCRETE CURB SECTION (5' WIDE) IS TO BE PROVIDED FOR ISLAND MAINTENANCE.

 TOWN OF HENRIETTA	RESIDENTIAL CUL-DE-SAC WITH RAISED CURB CENTER (GUTTERED ROADWAY)	
	SCALE: N.T.S.	RD-05
	DATE: 03/14/2012	